






LOUVERS & DAMPERS

**2110 1 3/8 INCH EXTRUDED ALUMINIUM STATIONARY EXHAUST LOUVER**

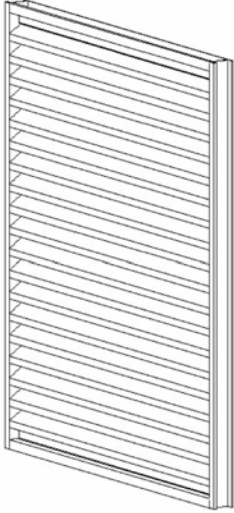

Quantity	Ref. #	Width (W)*	Height (H)*	Frame	Accessories
<b>PROJECT NAME:</b>				<b>ENGINEER:</b>	
<b>CONTRACTOR:</b>				<b>SUBMITTAL DATE:</b>	

**STANDARD CONSTRUCTION**

**Depth:** 1 3/8 Inches (35 mm)  
**Frame Style:** Specify 2110 For Channel Frame  
 Specify 2115 For Flange Frame  
**Frame Thickness:** 0.063" 6063-T5 Extruded Aluminium  
**Blade Thickness:** 0.063" 6063-T5 Extruded Aluminium  
**Blade Centres:** 1 1/8 Inches (29 mm)  
**Blade Angle:** 30 Degrees  
**Minimum Height:** 6 Inches (152 mm)  
**Maximum Panel Width:** 60Inches (1829 mm)  
**Maximum Panel Height:** 60 Inches (1829 mm)  
**Standard Finish:** Mill  
**Standard Birdscreen:** 1/2" x 1/2" Galvanized

**AVAILABLE ACCESSORIES**

**Bird Screen:** 1/4 x 1/4 Inter Crimped Aluminium  
 1/2 x 1/2 Inter Crimped Aluminium  
**Insect Screen:** 18 x 14 Mesh  
**Finish:** Mill Finish (Standard)  
 Paint Color #: V  
**Anodized Finish:** Clear Light Bronze  
 Medium Bronze Dark Bronze  
**Accessories:** Aluminium Blank Off Panel  
 1" or 2" Insulated Blank Off Panel  
 Extended Sills  
 Extended Sleeves

**Free Area of 48" x 48" Unit:** 7.71 Sq. ft.  
 0.716 m<sup>2</sup>

\*Louver will be manufactured 1/4" smaller than given opening dimensions, unless otherwise specified.



Models: 2110 and 2115  
Free Area in Square Feet

		WIDTH IN INCHES												
Inches		12	16	20	24	28	32	36	40	44	48	52	56	60
	12	0.39	0.53	0.67	0.81	0.95	1.09	1.23	1.37	1.51	1.65	1.79	1.93	2.07
	16	0.56	0.77	0.97	1.18	1.38	1.59	1.79	2.00	2.20	2.41	2.61	2.82	3.02
H	20	0.70	0.95	1.20	1.46	1.71	1.96	2.22	2.47	2.72	2.98	3.23	3.48	3.74
	24	0.87	1.19	1.51	1.83	2.15	2.46	2.78	3.10	3.42	3.73	4.05	4.37	4.69
E	28	1.01	1.37	1.74	2.11	2.47	2.84	3.20	3.57	3.94	4.30	4.67	5.03	5.40
	32	1.18	1.61	2.05	2.48	2.91	3.34	3.77	4.20	4.63	5.06	5.49	5.92	6.35
I	36	1.36	1.86	2.35	2.85	3.34	3.84	4.33	4.83	5.32	5.82	6.31	6.81	7.30
	40	1.49	2.04	2.58	3.12	3.67	4.21	4.75	5.30	5.84	6.38	6.93	7.47	8.01
G	44	1.67	2.28	2.89	3.49	4.10	4.71	5.32	5.93	6.53	7.14	7.75	8.36	8.96
	48	1.80	2.46	3.12	3.77	4.43	5.08	5.74	6.40	7.05	7.71	8.37	9.02	9.68
H	52	1.98	2.70	3.42	4.14	4.86	5.58	6.30	7.03	7.75	8.47	9.19	9.91	10.63
	56	2.11	2.88	3.65	4.42	5.19	5.96	6.73	7.50	8.27	9.03	9.80	10.57	11.34
T	60	2.29	3.13	3.96	4.79	5.63	6.46	7.29	8.13	8.96	9.79	10.63	11.46	12.29

Models: 2210 and 2215  
Percentage of Free Area

		WIDTH IN INCHES												
		12	16	20	24	28	32	36	40	44	48	52	56	60
	12	38.7%	39.5%	40.1%	40.4%	40.7%	40.8%	41.0%	41.1%	41.2%	41.3%	41.4%	41.4%	41.5%
	16	42.3%	43.2%	43.8%	44.2%	44.5%	44.7%	44.8%	45.0%	45.1%	45.2%	45.2%	45.3%	45.4%
H	20	41.8%	42.8%	43.3%	43.7%	44.0%	44.2%	44.3%	44.5%	44.6%	44.7%	44.7%	44.8%	44.8%
	24	43.7%	44.7%	45.3%	45.7%	46.0%	46.2%	46.3%	46.5%	46.6%	46.7%	46.8%	46.8%	46.9%
E	28	43.1%	44.1%	44.7%	45.1%	45.4%	45.6%	45.8%	45.9%	46.0%	46.1%	46.2%	46.2%	46.3%
	32	44.4%	45.4%	46.0%	46.4%	46.7%	46.9%	47.1%	47.2%	47.3%	47.4%	47.5%	47.6%	47.6%
I	36	45.4%	46.4%	47.0%	47.4%	47.7%	48.0%	48.1%	48.3%	48.4%	48.5%	48.5%	48.6%	48.7%
	40	44.8%	45.8%	46.5%	46.9%	47.2%	47.4%	47.5%	47.7%	47.8%	47.9%	48.0%	48.0%	48.1%
G	44	45.6%	46.6%	47.2%	47.7%	48.0%	48.2%	48.3%	48.5%	48.6%	48.7%	48.8%	48.8%	48.9%
	48	45.1%	46.1%	46.7%	47.2%	47.5%	47.7%	47.8%	48.0%	48.1%	48.2%	48.3%	48.3%	48.4%
H	52	45.7%	46.8%	47.4%	47.8%	48.1%	48.3%	48.5%	48.6%	48.8%	48.8%	48.9%	49.0%	49.1%
	56	45.3%	46.3%	47.0%	47.4%	47.7%	47.9%	48.1%	48.2%	48.3%	48.4%	48.5%	48.5%	48.6%
T	60	45.8%	46.9%	47.5%	47.9%	48.2%	48.4%	48.6%	48.8%	48.9%	49.0%	49.0%	49.1%	49.2%

### Recommended Specification

Furnish and install stationary louver models 2110 / 2115 as manufactured by Ventex, Bolton, Ontario. Louvers shall be 1.375 inches (35 mm) deep. Blades shall be 0.062 Inches (1.57 mm), frame shall be 0.062 (1.57 mm) extruded aluminium, alloy 6063-T5. All materials shall be factory finished after assembly with Polyester Baking Enamel in a color selected from the Ventex Color Chart.