



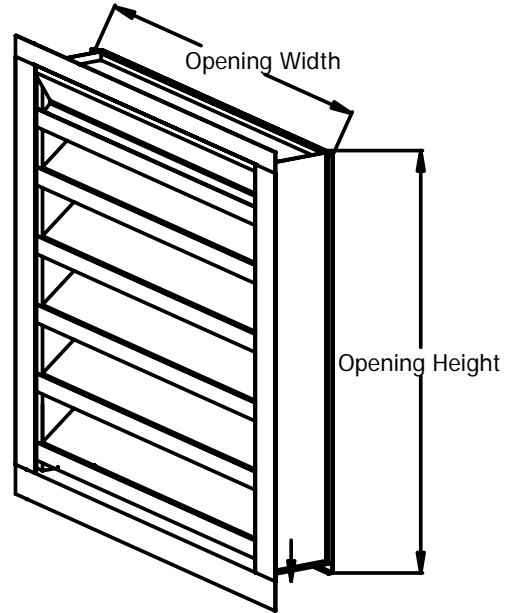

LOUVERS & DAMPERS

**2670-CLD HI PRO 6 INCH EXTRUDED ALUMINIUM DRAINABLE STATIONARY LOUVER**

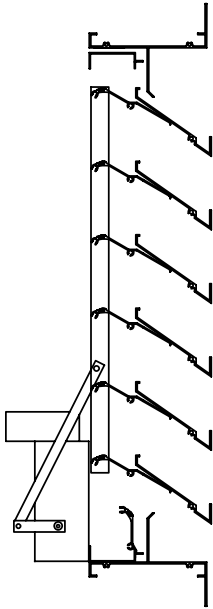

Quantity	Ref. #	Width (W)*	Height (H)*	Frame	Accessories
<b>PROJECT NAME:</b>				<b>ENGINEER:</b>	
<b>CONTRACTOR:</b>				<b>SUBMITTAL DATE:</b>	

**STANDARD CONSTRUCTION**

**Depth:** 6 Inches (152 mm)  
**Frame Style:** Channel Frame (2670-CLD) or Flange Frame (2675-CLD)  
**Frame Thickness:** 0.081" 6063-T5 Extruded Aluminium  
**Blade Thickness:** 0.081" 6063-T5 Extruded Aluminium  
**Blade Centres:** 3 3/4 Inches (96 mm)  
**Blade Angle:** 35 Degrees  
**Minimum Height:** 12 Inches (300 mm)  
**Maximum Panel Width:** 60 Inches (1524 mm)  
**Maximum Panel Height:** 60 Inches (1524 mm)  
**Free Area of 48" x 48" Unit:** 8.00 Sq.ft.  
**Standard Operation Method:** Motor Multi Products, 2 Position, External Spring Return. UL & CSA Approved  
**Standard Seals:** Vinyl Blade Seal.

**AVAILABLE ACCESSORIES**

**Bird Screen:** 1/2 x 1/2 Galvanized (Standard)  
 1/2 x 1/2 Aluminium  
**Insect Screen:** 18 x 14 Mesh  
**Finish:** Mill Finish (Standard)  
 Paint Color #: V

**Accessories:**

- Extended Sill
- Multi-Products Motor Packs (115 volt, 230 volt (single phase), 460 volt (single phase), & 24 volt AC )
- Belimo or Honeywell Motors available upon request.
- End switch
- Continuous Line construction is NOT AVAILABLE.

\* Louver will be manufactured 1/4" smaller than given opening dimensions, unless otherwise specified.