
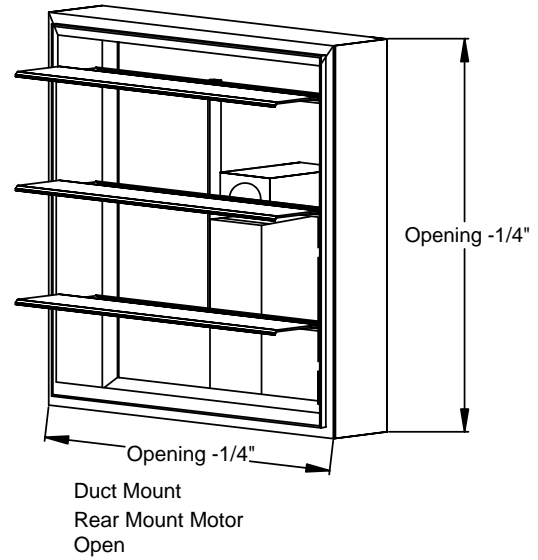
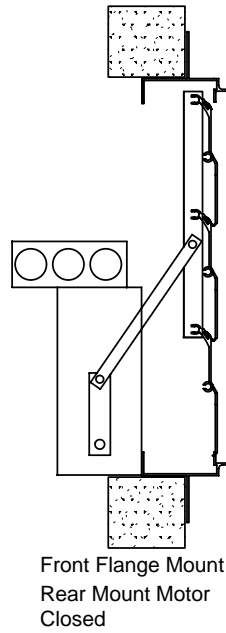


## MODEL: MBD EXTRUDED ALUMINIUM MOTORIZED DAMPER

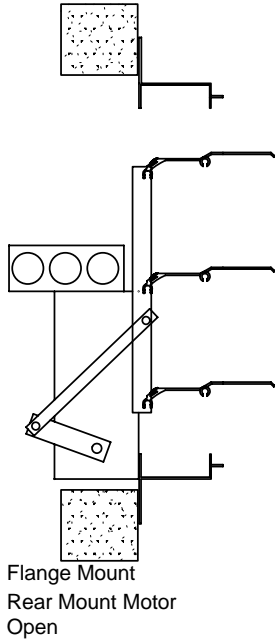

Quantity	Ref. #	Width (W) Opening Size*	Height (H) Opening Size*	Frame	Accessories
<b>PROJECT NAME:</b>					<b>ENGINEER:</b>
<b>CONTRACTOR:</b>					<b>SUBMITTAL DATE:</b>

### STANDARD CONSTRUCTION

**Depth Blades Closed:** 2 3/4" (70 mm)  
**Depth Blades Open:** 5 5/8" (143 mm)  
**Frame Style:** Specify "DM" For Duct Mount Frame  
 Specify "FM" For Flange Frame  
 Specify "FFM" For Front Flange Frame  
**Frame Thickness:** 0.062" 6063-T5 Extruded Aluminium  
**Blade Thickness:** 0.062" 6063-T5 Extruded Aluminium  
**Blade Centres:** 3 3/4 Inches (95 mm)  
**Minimum Height:** 8 Inches (203 mm)  
**Maximum Panel Width:** Single panel 40" (1016 mm)  
 Double Panel 60" (1524 mm)  
**Standard Finish:** Mill  
**Standard Birdscreen:** 1/2" x 1/2" Galvanized  
**Standard Operation Method:** Gravity  
**Standard Seals:** Vinyl Blade Seal.

### AVAILABLE ACCESSORIES

**Bird Screen:** 1/2 x 1/2 Birdscreen  
**Insect Screen:** 18 x 14 Mesh  
**Finish:** Mill Finish (Only)  
**Accessories:** Counter balancing without springs.  
 Conduit hole  
 Manual locking device to keep blades open  
 Manual Operation c/w 6ft of chain.  
 Jack shafts to operate multiple sections with a single motor  
 Galvanized bird screen  
 End switch  
 Belimo motors available

\*\*DM" & "FFM" Dampers will be manufactured 1/4" smaller than given opening dimensions, unless otherwise specified.  
 "FM" Dampers will be manufactured to the exact size ordered.