


MODEL: RFD ROLL FORMED ALUMINIUM BACK DRAFT DAMPER

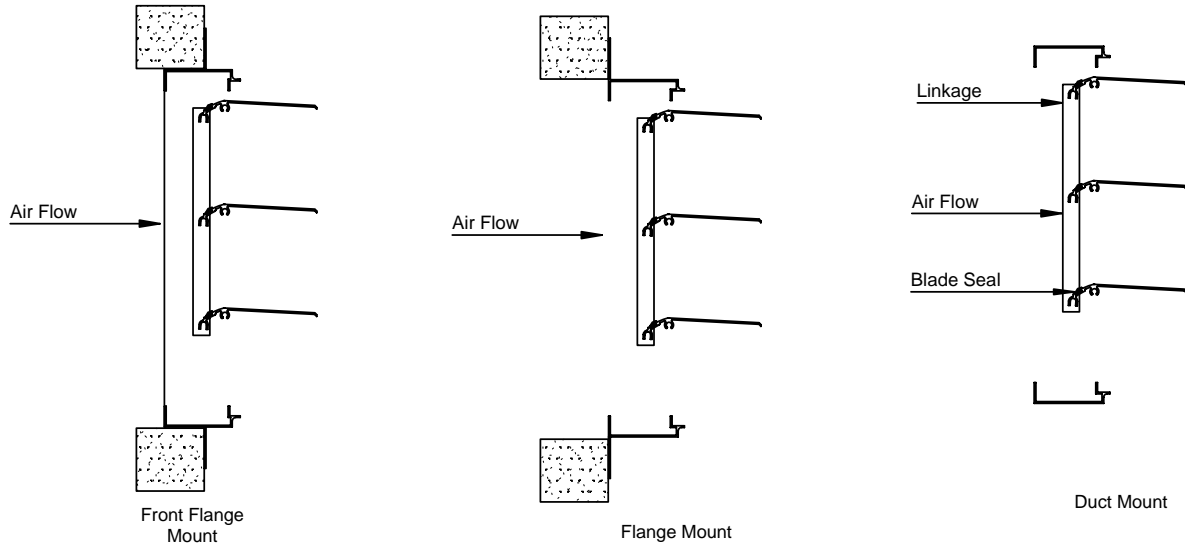

Quantity	Ref. #	Width (W) Opening Size*	Height (H) Opening Size*	Frame	Accessories
PROJECT NAME:					ENGINEER:
CONTRACTOR:					SUBMITTAL DATE:

STANDARD CONSTRUCTION

- Depth Blades Closed:** 2 3/4" (70 mm)
- Depth Blades Open:** 5 5/8" (143 mm)
- Frame Style:** Specify "DM" For Duct Mount Frame
Specify "FM" For Flange Frame
Specify "FFM" For Front Flange Frame
- Frame Thickness:** 0.062"
- Blade Thickness:** 0.032"
- Blade Centres:** 3 3/4 Inches (95 mm)
- Minimum Height:** 9 Inches (229 mm)
- Maximum Panel Width:** 60 Inches (1524 mm)
- Standard Finish:** Mill
- Standard Birdscreen:** 1/2" x 1/2" Galvanized
- Standard Operation Method:** Gravity
- Standard Seals:** Vinyl Blade Seal.

AVAILABLE ACCESSORIES

- Bird Screen:** 1/4 x 1/4 Inter Crimped Aluminium
1/2 x 1/2 Inter Crimped Aluminium
- Insect Screen:** 18 x 14 Mesh
- Finish:** Mill Finish (Only)
- Accessories:** Conduit hole

**DM" & "FFM" Dampers will be manufactured 1/4" smaller than given opening dimensions, unless otherwise specified.
 "FM" Dampers will be manufactured to the exact size ordered.